


PD-520 SINGLE MEASURING GUIDE & ORDER FORM




1150 S. 48TH STREET, GRAND FORKS, ND 58201
Phone: 701.746.4519 | **Toll Free:** 877.446.1519
Website: psfloodbarriers.com
Email: 4psinfo@psindustries.com

SWING DIRECTION:




= Keyed Side of Door

VISION LITE OPTIONS:

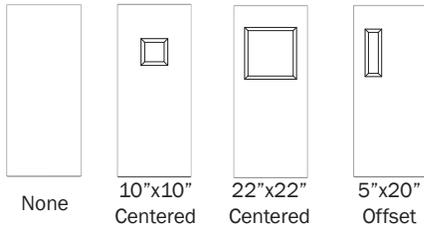

(Viewable Opening Size Shown)

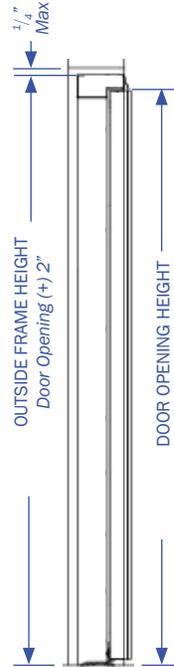

SIDE VIEW

← Positive Water Force Only
 ←



TOP VIEW

↑ Positive Water Force Only
 ↑

SOLD/QUOTE TO:	
NAME:	
COMPANY:	
ADDRESS:	
CITY, STATE, ZIP:	
PHONE:	FAX:
EMAIL:	

PROJECT INFO:			
PROJECT NAME:			
OPENING NAME:		QUANTITY:	
WATER PROTECTION HEIGHT:	(inches)	LOADING REQUIRED:	
HYDRODYNAMIC:	(FPS)	(PSF)	IMPACT: (LBS) " X "
DOOR OPENING WIDTH:	(inches)	DOOR OPENING HEIGHT: (inches)	

ACTIVE PANEL:	LATCHING HARDWARE:	VISION LITE:
LEFT PANEL	PANIC HARDWARE:	10"x 10"
RIGHT PANEL	EXTERIOR TRIM:	22"x 22"
CLOSER (INCLUDED)		5"x 20"

MOUNTING SURFACE:		
CIP	CMU (GROUT-FILLED)	STRUCTURAL STEEL (WALL THICKNESS IN INCHES)

DOOR/FRAME MATERIAL:	THRESHOLD TYPE:
MILD STEEL (STANDARD)	No. 2b (MILL FINISH)
316 STAINLESS STEEL	No. 4 (BRUSHED FINISH)
	1 1/2" ADA (STANDARD)
	1 1/4" RAISED (Required with WPH greater than 120")

TOP COAT PAINT COLOR: (SHERWIN-WILLIAMS INDUSTRIAL ENAMEL)	S/W#	COLOR:	sherwin-williams.com
--	------	--------	--

STAMPED CALCULATIONS REQUESTED:			FM LABEL REQUESTED:	
YES	STATE	NO	YES	NO
(Registered professional engineer stamped calculations from within the state or territory the building will be constructed or substantially improved.)			(Available on Specific Product Configuration, Consult PS Industries for Details; Maximum WPH of 36".)	