


PD-522 PAIRED MEASURING GUIDE & ORDER FORM




1150 S. 48TH STREET, GRAND FORKS, ND 58201
Phone: 701.746.4519 | **Toll Free:** 877.446.1519
Website: psfloodbarriers.com
Email: 4psinfo@psindustries.com

SWING DIRECTION:


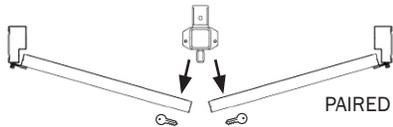


Key = Keyed Side of Door

VISION LITE OPTIONS:



(Viewable Opening Size Shown)

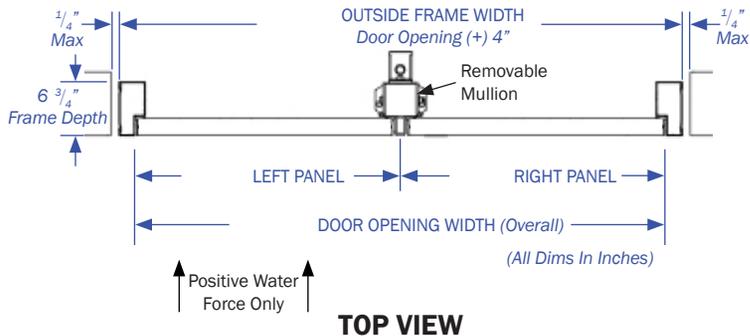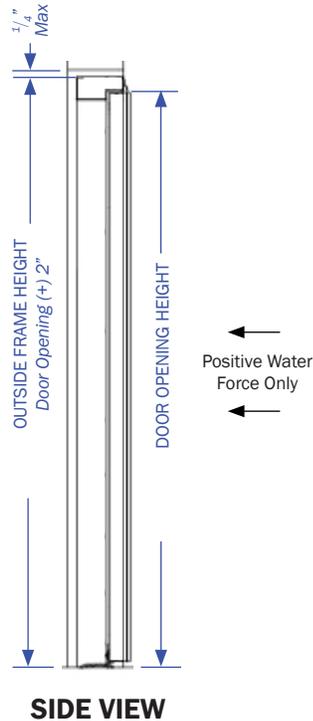

SOLD/QUOTE TO:

NAME: _____
 COMPANY: _____
 ADDRESS: _____
 CITY, STATE, ZIP: _____
 PHONE: _____ FAX: _____
 EMAIL: _____

PROJECT INFO:

PROJECT NAME: _____
 OPENING NAME: _____ QUANTITY: _____
 WATER PROTECTION HEIGHT: (inches) _____ LOADING REQUIRED: _____
 HYDRODYNAMIC: (FPS) _____ (PSF) _____ IMPACT: (LBS) " X "
 LEFT PANEL OPENING WIDTH: (inches) _____ RIGHT PANEL OPENING WIDTH: (inches) _____
 DOOR OPENING WIDTH: (OVERALL) (inches) _____ DOOR OPENING HEIGHT: (inches) _____

PAIRED ACTIVE PANEL(S):	LATCHING HARDWARE:	CLOSER:
LEFT PANEL	PANIC HARDWARE:	ACTIVE PANEL(S) (INCLUDED)
RIGHT PANEL	EXTERIOR TRIM:	
BOTH PANELS		

VISION LITES:	VISION LITE LOCATION:	MOUNTING SURFACE:
10"x 10"	LEFT PANEL	CIP
5"x 20"	RIGHT PANEL	CMU (WALL THICKNESS (GROUT-FILLED) IN INCHES)
	BOTH PANELS	STRUCTURAL STEEL

DOOR/FRAME MATERIAL:	THRESHOLD TYPE:	
MILD STEEL (STANDARD)	No. 2b (MILL FINISH)	1/2" ADA (STANDARD)
316 STAINLESS STEEL	No. 4 (BRUSHED FINISH)	1 1/4" RAISED (Required with WPH greater than 96")

TOP COAT PAINT COLOR: (SHERWIN-WILLIAMS INDUSTRIAL ENAMEL) S/W# _____ COLOR: _____ sherwin-williams.com

STAMPED CALCULATIONS REQUESTED:			FM LABEL REQUESTED:	
YES	STATE	NO	YES	NO
<small>(Registered professional engineer stamped calculations from within the state or territory the building will be constructed or substantially improved.)</small>			<small>(Available on Specific Product Configuration, Consult PS Industries for Details; Maximum WPH of 36".)</small>	